


LINEAR SHAFTS AND BALL BUSHINGS

▼ LME_L SERIES (EUROPE SERIES)

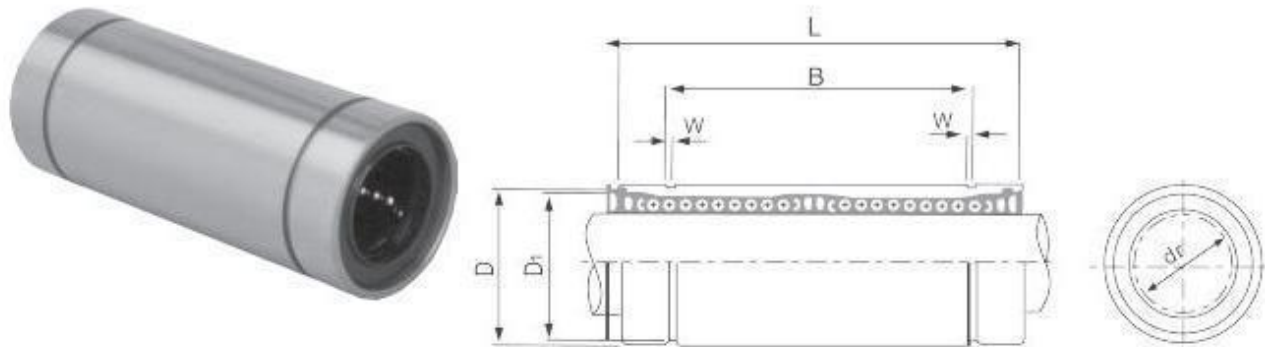

Type	Ball circuit	dr		D		L		B		D1	W	Eccentricity (max.)	Radial clearance (max.)		Weight	
		(mm)	(µm)	(mm)	(µm)	(mm)	(µm)	(mm)	(µm)	(mm)	(mm)		(µm)	C		CO
														(N)		(N)
LME8LUU	4	8	+9	16	0-9	46		33		15,2	1,1	15	421	804	40	
LME12LUU	4	12	+1	22	0	61	0	45,8	0	21	1,3		813	1570	80	
LME16LUU	5	16	+11	26	-11	68	-300	49,8	-400	24,9	1,3		921	1780	115	
LME20LUU	5	20	-1	32		80		61		30,3	1,6	17	1370	2740	180	
LME25LUU	6	25	+13	40	0	112		82		37,5	1,85		1570	3140	430	
LME30LUU	6	30	-2	47	-13	123		104,2		44,5	1,85		2500	5490	615	
LME40LUU	6	40		62	0	151	0	121,2	0	59	2,15	20	3430	8040	1400	
LME50LUU	6	50	+16	75	-15	192	-400	155,2	-500	72	2,65		6080	15900	2320	
LME60LUU	6	60	-4	90	0/-20	209		170		86,5	3,15		7550	20000	3900	