





TRS-F Series Dimension Table



Model No.	Assembly(mm)			Block(mm)								Rail(mm)							
	H	W2	E	W	B	J	t	L	L1	QX l	T1	Oil Hole	N	W1	H1	ØD	h	Ød	F
TRS15FS	24	18.5	3.2	52	41	26	7	39.3	22.9	M5X7	5.5	M4X0.7	7	15	13	7.5	6	4.5	60
TRS15FN	28	19.5	4.6	59	49	32	9	66.7	46.7	M6X9	4.5	M6X1	14	20	16.5	9.5	8.5	6	60
TRS25FS	33	25	5.8	73	60	35	10	56.2	35.2	M8X10	4.5	M6X1	14	23	20	11	9	7	60
TRS25FN																			

Model No.	Rating Load (kg)		Static permissible moment of load						Weight	
	C	Co	Mx(kg-f-mm)		My(kg-f-mm)		Mz(kg-f-mm)		Block (kg)	Rail (kg/m)
			Single Block	Double Block	Single Block	Double Block	Single Block	Double Block		
TRS15FS	908	1471	10,957	6,420	33,531	6,420	33,531	0.098	1.32	
TRS15FN	1206	2206	16,436	14,884	70,960	14,884	70,960	0.17		
TRS20FN	1896	3307	33,404	26,459	126,998	26,459	126,998	0.24	2.28	
TRS25FS	1943	3002	34,826	18,725	97,890	18,725	97,890	0.26	3.17	
TRS25FN	2581	4503	52,239	43,407	207,324	43,407	207,324	0.44		

TRC-V Series Dimension Table

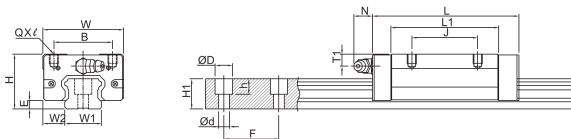

Model No.	Assembly(mm)			Block(mm)								Rail(mm)							
	H	W2	E	W	B	J	L	L1	QX l	T1	Oil Hole	N	W1	H1	ØD	h	Ød	F	
TRC25VL	36	12.5	5.8	48	35	35	92	71	M6X6.5	7.5	M6X1	14	23	20	11	9	7	60	
TRC25VE																			

Model No.	Rating Load (kg)		Static permissible moment of load						Weight	
	C	Co	Mx(kg-f-mm)		My(kg-f-mm)		Mz(kg-f-mm)		Block (kg)	Rail (kg/m)
			Single Block	Double Block	Single Block	Double Block	Single Block	Double Block		
TRC25VL	2875	5254	60,945	59,579	277,678	59,579	277,678	0.44	3.17	
TRC25VE	3248	6255	72,554	85,112	391,311	85,112	391,311	0.55		